


freund 

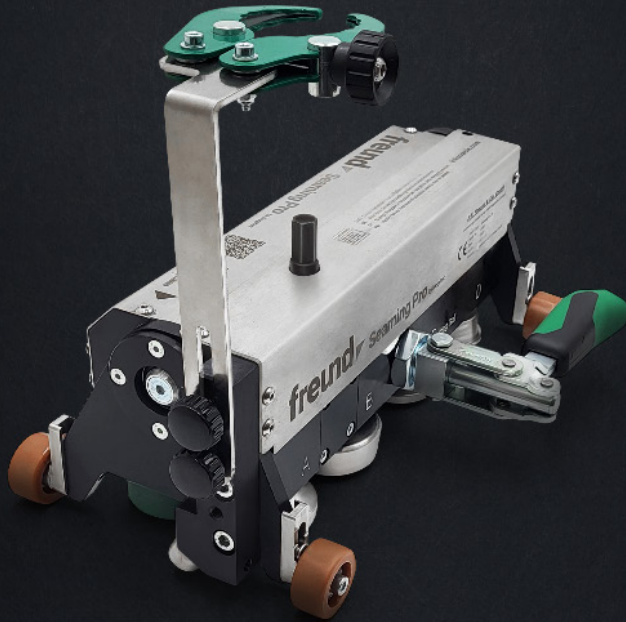

Seaming Pro® New
Generation

Your Seaming
Machine

Because One Device Has Three Functions

More profit, very easy to use and results that are premium – just like you! This is what the Seaming Pro® New Generation – our seaming tool – stands for. With it you save an enormous amount of time. No matter whether you create double standing seams or single standing seams! Or cut off the old seam. It can do everything. Simply mount your regular cordless screwdriver on the Seaming Pro® New Generation and get started!

Get the Seaming Pro® New Generation for your next construction site!



Outdoor-Box



Impact resistant, dust and waterproof (IP67):
With the new outdoor case, your Seaming Pro® is especially protected against external effects

Optimized:
The new hexagonal connection is reinforced by a thrust bearing



Simple:
The cordless screwdriver can be attached and fixed without tools

Convenient:
The cordless screwdriver holder has no longer needs to be specially removed for transport and can be folded to the side without tools

Safe and stabilizing:
The front roller fixes the Seaming Pro® to the seam and prepares the closing of the angled seam

Steplessly adjustable in height:
The track wheels are adjustable from 25 mm to 38 mm (1" - 1.5") seamlessly

Extra smooth running:
Thanks to the ball bearings in the track wheels, the operation is extra smooth

Protective:
Due to high-quality rubber wheels, the sheet metal roof is particularly protected during processing


Ready For The Next Generation?

Seaming Machine

Seaming Pro[®] New Generation

Application

Universal supporter:
Creates double standing seams or single standing seams and also cuts the old seam perfectly – all this with only one handy device!

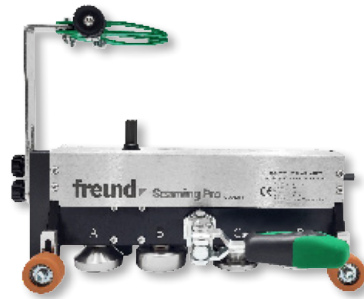

Item no. 93000000

Item no.	Dimensions	Weight	PU
93000000	300 x 200 x 140 mm	6,5 kg	1

Scope of delivery:

- Seaming Pro[®] seaming machine equipped with stainless steel forming rolls
- Holder for cordless screwdriver, already mounted and applicable without further tools
- Cutting wheels
- Ball-bearing, height-adjustable rubber roller for seaming heights of 25 mm, 32 mm and 38 mm (1.0" - 1.5")
- Allen key in 3,4,5,6 mm
- Robust transport box is impact resistant and waterproof (IP67)
- User manual

Accessories:

93000010	Track rollers for 25 mm seams (4 pieces)	760g	1
----------	--	------	---

Your Benefits at a Glance

- Complete: 1 unit for 3 applications – double standing seam, single standing seam and cutting off the old seam
- Fast: Creates double standing seams in just one step – up to 8 to 12 meters (26 - 39ft) per minute
- Wireless: Simply attach your standard cordless screwdriver to one of two holders (roof or facade)
- Light and compact: The device weighs 6.5 kg (14 lbs) without cordless screwdriver
- Problem-solving: Can be unlatched and latched into the seam
- Flexible: Quick modification to the different functions
- Time-saving: No need to pre-seam seam with square seam folder or twin square seam folder
- Steplessly adjustable in height: The track wheels are adjustable from 25 mm to 38 mm (1" - 1.5") seamlessly
- Flat: Fits between facade and scaffolding
- Universal: You can process copper, zinc and aluminum up to 0.7 mm (21 gauge), galvanized or colored steel up to 0.6 mm (22 gauge), as well as stainless steel up to 0.5 mm (24 gauge)
- Extra smooth running: Thanks to the ball bearings in the track wheels, the operation is extra smooth
- Protective: Due to high-quality rubber wheels, the sheet metal roof is particularly protected during processing
- Simple: The cordless screwdriver can be attached and fixed without tools
- Impact resistant, dust and waterproof (IP67): With the new outdoor case, your Seaming Pro[®] is especially protected against external effects
- Safe and stabilizing: The front roller fixes the Seaming Pro[®] to the seam and prepares the closing of the angled seam

User's manual



Application video



freund

P. F. Freund & Cie. GmbH

Hahnerberger Str. 94-96


42349 Wuppertal

Germany

T +49 202 40929-0

info@freund-cie.com

www.freund-cie.com



W0000240